



Zebra® GK420™ Healthcare Printer



SEE MORE. DO MORE.



GK420d Healthcare



GK420t Healthcare

The Challenge

Safeguarding patient health is of utmost importance in the healthcare industry, followed by adhering to compliance standards. New government regulations impose substantial penalties for non-compliance with patient-safety mandates.

Keeping instruments, tools and products that come into contact with patients clean of any potential germs, blood or other infectious liquids is critical. Recommended industrial cleaners can be harsh. Healthcare facilities need devices that can withstand this regular cleaning so facilities remain compliant with minimal disruption. Additionally, power supply units for medical electrical equipment used throughout healthcare facilities must be certified to meet IEC 60601-1 specifications. Complying with these standards can be complex and costly.

The Solution

Protecting patient safety and ensuring compliance with standards just got easier with Zebra's GK420 Healthcare printers. Part of Zebra's healthcare product line, GK420 Healthcare desktop printers are constructed using durable materials designed to withstand regular cleaning with harsh disinfectant chemicals over their lifetime.

Engineered for years of performance specifically in healthcare environments, these printers come in a colour palette designed for the industry. And, GK420 Healthcare printers are designed with a medicalgrade power supply that meets IEC 60601-1 standards to further protect patient and staff safety by reducing the risk of electrical shock. Now, healthcare professionals can print labels and wristbands anywhere in a healthcare facility.

Ideal for these applications

- Medication identification in the pharmacy
- Sample processing and slide labelling in the lab
- Tissue identification and implant tracking in the surgery centre
- Blood bank labelling
- Breast milk bank labelling
- Medical records labelling
- Compliance labelling
- Asset identification and tracking

ACHIEVE NEW LEVELS OF HIGH PERFORMANCE WITH INCREASED PRODUCTIVITY, FLEXIBILITY AND IMPROVED ROI.

Easy Integration

Available in both direct thermal and thermal transfer models, GK420 Healthcare printers can accommodate a broad range of applications in a healthcare setting. Advanced connectivity options include standard Serial/USB/Parallel communication and optional USB/Ethernet models, so these printers can be easily integrated into existing local or networked systems. And, native ZPL® and EPL™ programming languages ensure GK420 Healthcare printers fit in perfectly with other Zebra printers.

Reliable Performance

Building on the GK420's proven reputation for reliable printing in space-constrained environments, the 4-inch GK420 Healthcare printers deliver advancements in healthcare-specific construction and electrical certifications. Featuring a medical-grade power supply and constructed with durable, disinfectant-ready materials in the desired healthcare colour palette, these printers can withstand regular cleaning with harsh chemicals over their lifetime to perform anywhere in the healthcare environment.

Adherence to Industry Standards

Designed with a medical-grade power supply certified to IEC 60601-1 standards, GK420 Healthcare printers protect patient and staff safety by reducing the risk of electrical shock. And, these printers can produce labels that meet the Clinical and Laboratory Standards Institute® (CLSI) harmonisation standard.

Certified for Healthcare Applications

As with all of Zebra's healthcare solutions, GK420 Healthcare printers are certified and recommended by all of the leading Electronic Health Records (EHR) providers. And, these printers are certified to print International Society of Blood Transfusion (ISBT) 128 blood bag labels.

Space and Cost Savings

Easy to use, GK420 Healthcare printers boast the smallest footprint of any 102mm desktop printer and the easiest ribbon-loading system available. ENERGY STAR® 2.0 qualified, these printers also reduce operational costs.

Cleaning Made Simple

The following cleaning agent ingredients are safe to use on GK420 Healthcare printers:


- Isopropyl and Ethyl alcohol (including wipes)
- Ammonium
- Hydrogen peroxide
- Phosphoric acid
- Bleach/sodium hypochlorite
- Mild dish soap



ZEBRA'S GK420 HEALTHCARE PRINTERS ARE AVAILABLE IN TWO MODELS: THERMAL TRANSFER GK420T HEALTHCARE & DIRECT THERMAL GK420D HEALTHCARE.

DIRECT THERMAL VS. THERMAL TRANSFER: WHICH MODEL BEST MEETS YOUR NEEDS?

Application	Recommended Print Technology
Laboratory and Surgery Centre Labelling	Thermal Transfer – Labels on specimens may be subjected to harsh cleaning products, sterilization or temperature extremes. Thermal transfer printing typically provides more durable printed output.
Blood and Milk Bank Labelling	Thermal Transfer – Donated blood and breast milk samples may be subjected to cleaning agents and temperature extremes. Thermal transfer printing offers a more durable and longer-lasting printed output.
Medical Records Labelling	Direct Thermal – Use direct thermal if patient privacy is a concern or the labels will be used for a shorter period of time. Since Direct Thermal printers don't use a ribbon, there is no secondary record of the printed information that would require careful disposal. For longer lasting labels, thermal transfer may be required.
Prescription Labelling	Direct Thermal – With no secondary record of printed information, Direct Thermal printing offers added security in safeguarding patient privacy.
Asset Tracking Labelling	Thermal Transfer – Assets may be subject to harsh cleaning products and identification may be required for several years. Labels printed with Thermal Transfer technology are more durable.

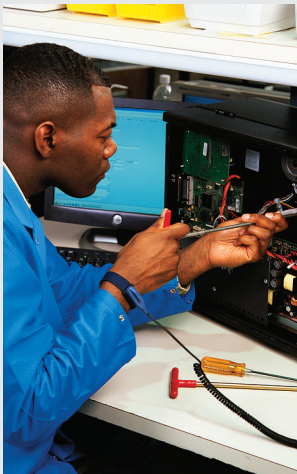

ZebraCare™ Services

Increase printer uptime and reduce lost productivity and unbudgeted repair costs by selecting a ZebraCare service agreement. A cost-effective means of planning and budgeting for your annual maintenance expenditures, your agreement ensures that trained Zebra technicians will bring your printer back to factory specifications. Zebra offers a variety of plans to fit your budget and business needs.



Genuine Zebra™ Supplies

Ensure consistent print quality and reduce downtime with Genuine Zebra supplies. Zebra manufactures each supplies product, including healthcare-specific media, with the exact same materials every time so you always get crisp, readable and scannable output without needing to adjust the printer darkness setting between rolls.



Zebra's IQ Color labels were developed to meet CLSI's approved standard for specimen collection and give clinicians the ability to highlight the priority status and container type in red as indicated at the left side of the label. Zebra also offers standard paper labels and moisture-resistant polypropylene labels for use with samples that need to be placed in ice upon collection.

SPECIFICATIONS AT A GLANCE*

Printer Name

GK420d Healthcare (direct thermal)
GK420t Healthcare (thermal transfer)

Standard Features

- Print methods: thermal transfer or direct thermal
- Programming language: EPL and ZPL are standard
- Construction: dual-wall frame
- Tool-less printhead and platen replacement
- OpenACCESS™ for easy media loading
- Quick and easy ribbon loading
- Auto-calibration of media
- Triple connectivity: USB, Parallel, Serial
- ENERGY STAR® qualified

Printer Specifications

Resolution

- 203 dpi/8 dots per mm

Memory

- Standard: 4 MB Flash; 8 MB SDRAM

Print Width

- 104mm/4.09"

Maximum Print Length

- 990mm/39.0"

Maximum Print Speed

- 127mm/5" per second

Media Sensors

- Standard: Fixed reflective and transmissive sensors

Media Characteristics

Label and Liner Length

- Maximum non-continuous: 990mm/39"
- Minimum label length: 9.7mm/.38"

Maximum Label and Liner Width

- 19mm/0.75" to 108mm/4.25"

Maximum Media Roll Size

- 127mm/5" O.D.

Media Thickness

- 0.08mm/0.003" to 0.19mm/0.0075"

Media Types

- Roll-fed or fan-fed, die-cut or continuous direct thermal labels with or without black line, tag stock, continuous receipt paper, wristbands

Ribbon Characteristics

- Outside diameter: 35mm/1.36"
- Standard length: 74m/244'
- Ratio: 1:1 media to roll to ribbon
- Width: 33.8mm/1.33" to 109.2mm/4.3"
- Core inner diameter: 12.7mm/0.5"

Operating Characteristics

Environmental

- Operating temperature: 4.4°C/40°F to 41°C/105°F
- Storage temperature: -40°C/-40°F to 60°C/140°F
- Operating humidity: 10% to 90% non-condensing
- Storage humidity: 5% to 95% non-condensing

Electrical

- Auto-detectable (PFC Compliant) 100-240VAV, 50-60Hz
- ENERGY STAR qualified
- IEC 60601-1 Certified

Agency Approvals

- Emissions: FCC Part 15, Subpart B, VCCI, C-Tick
- Emissions and Susceptibility: (CE): EN55022 Class-B, EN61000-3-2, EN61000-3-0 and EN55024, CCC
- Safety: CB Scheme IEC IEC 60950:1991 +A1 +A2 +A3 +A4, TUV NRTL, IRAM NOM, AAMI, CCC

Physical Characteristics

	Direct Thermal	Thermal Transfer
Width:	171 mm/6.75"	193 mm/7.6"
Height:	152 mm/6.0"	191 mm/7.5"
Depth:	210 mm/8.25"	254 mm/10.0"
Weight:	1.4 kg/3lbs	2.1 kg/4.6lbs

ZebraLink™ Solutions

Software

- ZebraDesigner™ Pro
- ZebraDesigner
- ZebraNet™ Bridge Enterprise
- ZebraNet Utilities v7.0
- Zebra Universal Driver
- ZebraDesigner Driver
- ZBI-Developer™
- POS Driver

Networking and Connectivity

- Ethernet – 10/100 internal (optional) offered in combination with USB and Serial interface (replaces Parallel port)

Firmware

- EPL2™
- EPL Line Mode (direct thermal only)
- ZPL II®
- Web View
- Alert
- ZBI™

Communication and Interface Capabilities

- RS-232 auto-sensing Serial interface, DB-9
- USB V1.1, bi-directional
- Centronics® parallel
- Ethernet – 10/100 internal (optional, replaces Serial and Parallel ports)

Fonts/Graphics/Symbologies

Fonts and Character Sets

- 16 resident expandable ZPL II bitmap fonts
- One resident scaleable ZPL font
- Five resident expandable EPL2 fonts
- Native open type font support
- Unicode™ compliant for multi-language, on-demand thermal printing

Graphic Features

- Supports user-defined fonts and graphics – including custom logos
- ZPL II drawing commands – for boxes and lines

Barcode Symbologies

- Barcode Ratios: 2:1 (non-rotated) and 3:1
- Linear Barcodes: Codabar, Code 11 (ZPL), Code 128, Code 39, Code 93, Code 93, EAN-13, EAN-8, EAN-14 (ZPL), German Post Code (EPL), Industrial 2-of-5 (ZPL), Interleaved 2-of-5, Japanese Postnet (EPL), ISBT-128 (ZPL), Logmars (ZPL), MSI, Plessey, Postnet, GS1 DataBar (RSS-14), Standard 2-of-5 (ZPL), UCC/EAN-128 (EPL), UPC and EAN 2 or 5 digit extensions (ZPL), UPC-A, UPC-A and UPC-E with EAN 2 or 5 digit extensions, UPC-E, and GS1 Databar (formerly RSS)
- 2-Dimensional: Codablock (ZPL), Code 49 (ZPL), Data Matrix, MaxiCode, QR Code, PDF417, MicroPDF417, Aztec (For EPL and ZPL except where noted)

Options and Accessories

- ZebraNet® 10/100 Print Server – Internal Ethernet for network communication and printing
- Font Packs – Asian and other international font kits
- ZKDU and KDU Plus™ keyboard display units for stand-alone printing solutions
- Interface cables and adapters



CONTACT:

Pentoprint BV
Minervum 7460
4817 ZP BREDA
Tel.: +31 (0)76 572 37 77
Fax: +31 (0)76 587 60 00
info@pentoprint.com
www.pentoprint.com / www.zebraprintershop.nl



*Specifications subject to change without notice.

©2014 ZIH Corp. Zebra and the Zebra head graphic are registered trademarks of ZIH Corp. All other registered and unregistered trademarks are the property of their respective owners. All rights reserved.