

# LYNC-817

Fanless 17" Industrial Panel PC with Intel® Celeron® Processor J1900



## Features

- Less Cable , Fanless Design
- User Selectable Modularized Design
- 17" 1280 x 1024 SXGA LCD Display w/ LED Backlight
- Front Panel IP65 Compliant
- Serial Ports (RS-485), w/ Auto-flow Control
- Mini-card Sockets x 1, PCI x 1 or PCIe x 1
- Semi-Piercing DB9 Hole Reserved for Field-bus Card
- SMA Antenna Holes for optional WiFi Function
- 9~36V Wide Range DC Input

## System

CPU	Intel® Celeron® Processor J1900 2.0GHz 2 x DDR3 SO-DIMM Socket, supporting 1066/1333 MHz SDRAM up to 8GB
Memory	1 x 4GB DDR3 SO-DIMM memory module installed
LAN	2 x Intel® I210AT GbE controllers
Watchdog Timer	1~255 levels reset

## Storage

1st Device	1 x outside-accessible CFAST slot
2nd Device	1 x outside accessible 2.5" Drive Bay (Default), or CFAST slots ( optional)

## LCD Display

Size/Type	17" TFT LCD Panel
Max. Resolution	1280 x 1024, SXGA
Max. Colors	16.2M
Luminance	350 cd/m <sup>2</sup>
Touch Screen	5-wire Analog Resistive

## Button & Indicator

Function Key	Power on/off
LED Indicator	Power on LED

## Power System

Power Input	DC 9~36V
-------------	----------

## Certification

EMC / EMI	CE, FCC Class A
-----------	-----------------

## Expansion

Expansion Bus	1 x Mini-card socket ( full-size)
	1 x PCI 32-bit slot (default) or 1 x PCIe x1 slot (included in Standard Accessories)
Optional	1 x semi-piercing DB9 hole reserved

## External I/O

Serial Ports	2 x RS-232 and 2 x RS232/485 ports with auto-flow design, all are DB9 connectors
USB Ports	1 x USB 3.0 Type-A USB port 3 x USB 2.0 Type-A ports
LAN	2 x RJ-45 GbE ports
DVI	1 x DVI-I connector
WiFi	2 x SMA antenna holes for optional WiFi function
Audio	Line-out

## Mechanical

Mounting Type	Panel Mounting and VESA-75/100 Mounting
Chassis	Panel-mounting chassis, aluminum front bezel and SECC steel chassis
Dimension (W x H x D)	428.00 x 380.00 x 77.00 mm (16.8" x 14.9" x 3.0")
Weight (Net)	6.5 kg (14.3 lb)

## Environmental

Operating Temp.	-0°C ~ 55°C (-32 ~ 131°F)
Storage Temp.	-10°C ~ 75°C (-50 ~ 167°F)
Operating Humidity	10 ~ 95% RH @ 60°C (non-condensing)
Vibration	5 ~ 500Hz, 2Grms Random (with CF/SSD)
Shock	Operating 10G, 11ms Non-operating 30G, 11ms (with CF/SSD)

## OS Support


W7 Pro / WS7E / W8.1 Industry	
-------------------------------	--

## Ordering Information

LYNC-817	17" Intel® Celeron® Processor J1900 industrial panel PC
----------	---



## Dimensions

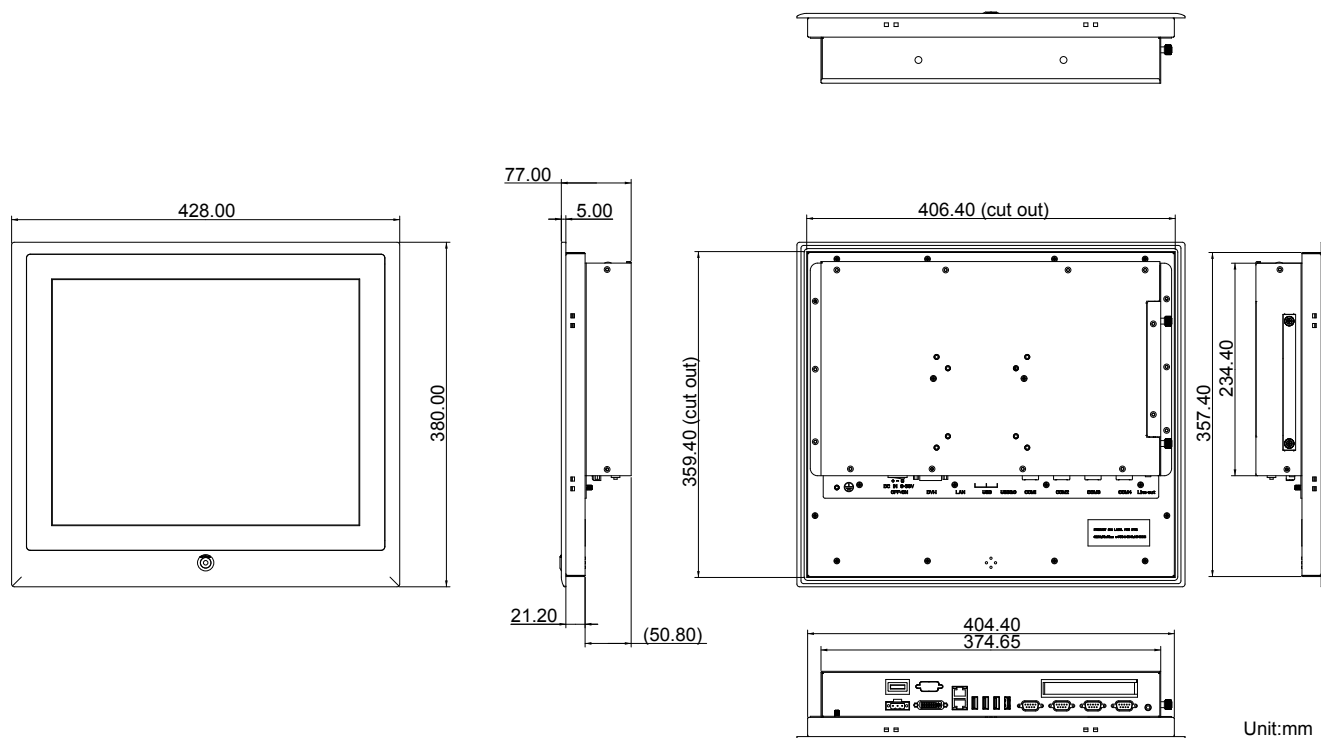

### Optional Accessories

PAC-P065W 19V/3.4A 65W AC/DC power adapter kit



### Optional Accessories (CTOS\* Kit)

80GB SSD Intel® 2.5" 80GB SATAIII SSD kit



MM-3C-4G 4GB DDR3-1333 SDRAM



ANT-D11 1 x WiFi Dual-band 2.4G/5G antenna



\*CTOS means Configure-to-Order Service.