



For every orientation.
CLX 490 Compact OMNI Scanner.
With auto focus and tracking.

Omni Line

PRELIMINARY EDITION

SICK

With auto focus and tracking.

Compact solution for omnidirectional reading

Based on outstanding CLV 490, the new CLX 490 provides a very compact solution for omnidirectional scanning even at minimum gap between objects.

The complete functionality of Omni Scanning is now integrated into one compact industrial housing, providing same high speed scanning frequency as the CLV 490.




The CLX 490 at a glance:

- X-scanner
- Tracking included for smallest gap between objects
- Max. scanning frequency 1200 Hz for complete x-pattern
- Real-time AUTO FOCUS function
- Reliable code recognition using SMART technology
- Smallest unit in its class
- Additional interface for external parameter memory
- Flash PROM
- Optional heater

THE CLX 490 ADVANTAGES AT A GLANCE

- Same scanning frequency and decoding performance as for CLV 490 bar code scanner
- No additional components required to detect the object distance
- Automatic scanner parameterization minimizes tool down time in case of scanner exchange
- CLX 490 can also be used as additional bar code scanner in a SICK Omni Portal System, e.g. as scanner for side reading

Reading field height [mm]

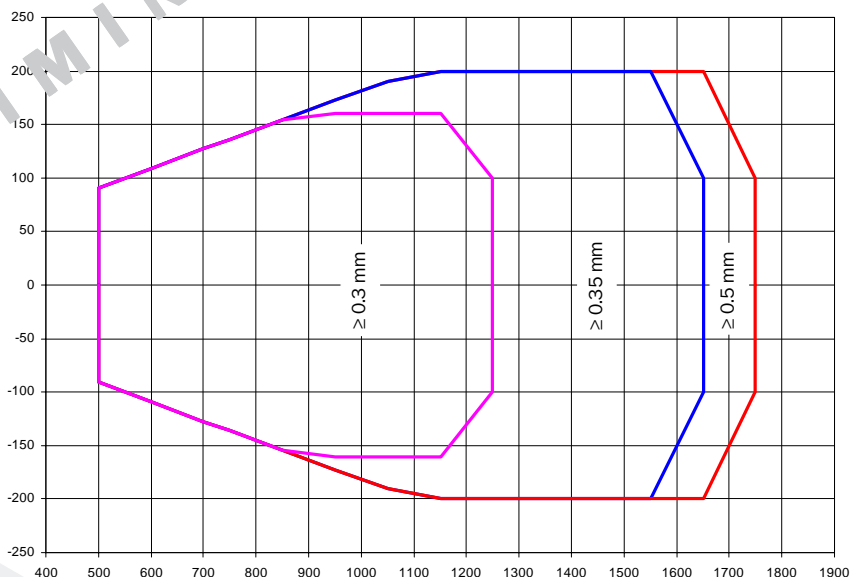

Reading conditions:

Test code: code 128
 Print contrast: > 90%
 Ambient light: < 2000 lx


Tilt: omnidirectional
 Pitch: -15° ... +15°
 Skew: -15° ... +15°

Reading field diagram of CLX 490


Reading distance [mm]

CLX 490 OMNI Scanner

Design	X-scanner (2 lines crossed at 90°)
Light source	Laser diode, red light ($\lambda = 650 \text{ nm}$)
Laser class	2 (to EN 60825-1)
Ambient light compability	2000 lx (on bar code)
Scanning frequency	600 ... 1200 Hz
Operation and parametrization	with Windows-based CLV-Setup software or command strings
Indicators	4 LED status indicators
Data interface	Host: RS 232, RS 422/485; Terminal: RS 232
Switching inputs/ outputs	6 x IN / 4 x OUT
Operating voltage	18 ... 30 V DC
Power consumption	typical 9 W, max. 16 W
Electrical connections	2 x 15pin D Sub-HD plug/socket
Housing	Die-cast aluminium
Enclosure rating	IP 65 (to DIN 40 050)
Protection class	class 3 (to VDE 0106)
EMC test	to IEC 801
Weight	approx. 2.2 kg
Temperature (ambient operating/storage)	0 ... +40 °C / -20 ... +70 °C



All dimensions in mm

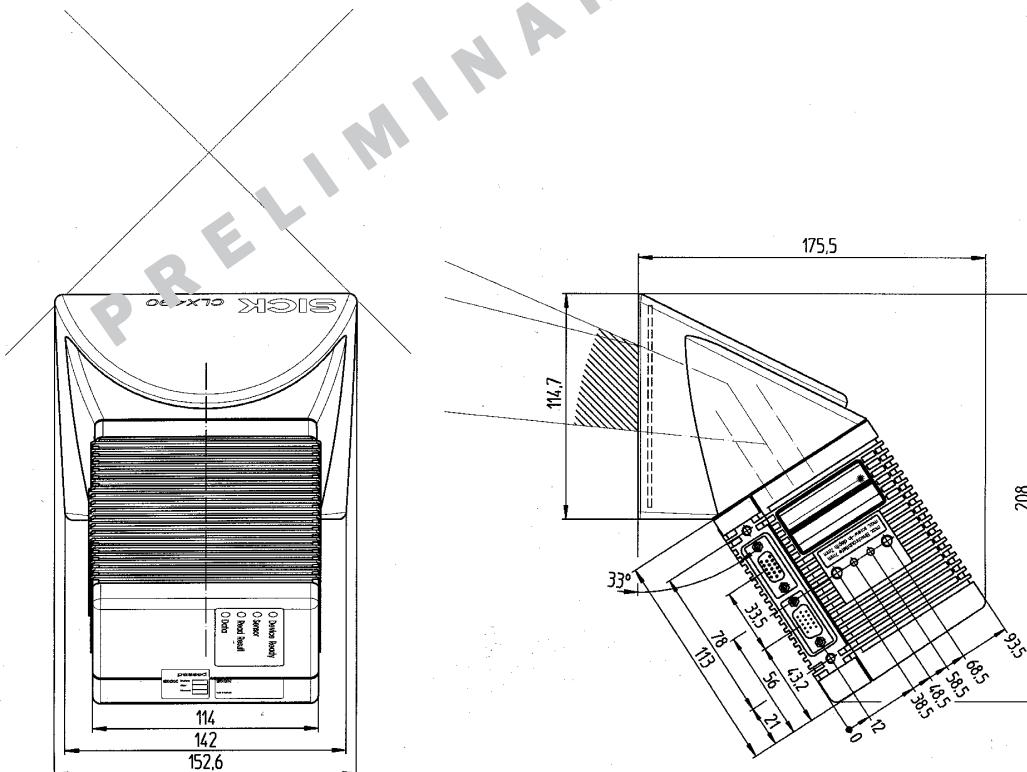



SICK AG
Auto Ident
Nimburger Strasse 11
79276 Reute
Germany
<http://www.sick.de>

Australia

Phone +61 3 9497 4100
(0 08) 33 48 02-toll free
Fax +61 3 9497 1187

Austria

Phone +43 22 36/62 28 8-0
Fax +43 22 36/62 28 85

Belgium/Luxembourg

Phone +32 24 66 55 66
Fax +32 24 63 35 07

Laser Measurement Systems:

Phone +32 9 2240 394
Fax +32 9 2235 645

Brazil

Phone +55 11 5561 2683
Fax +55 11 535 4153

China/ Hong Kong

Phone +85 2 2763 6966
Fax +85 2 2763 6311

Czech Republic

Phone +42 02-579 11 850
+42 02-578 10 561
Fax +42 02-578 10 559

Denmark

Phone +45 45 82 64 00
Fax +45 45 82 64 01

Finland

Phone +358 9-728 85 00
Fax +358 9-72 88 50 55

France

Phone +33 1 64 62 35 00
Fax +33 1 64 62 35 77

Germany

Phone (+49 2 11) 53 01-0
Fax (+49 2 11) 53 01-1 00

Great Britain

Phone +44 17 27-83 11 21
Fax +44 17 27-85 67 67

Italy

Phone +390 11/2 23 66 01
Fax +390 11/2 23 66 09

Japan

Phone +81 3 3358 1341
Fax +81 3 3358 0586

Netherlands

Phone +31 30 229 25 44
Fax +31 30 229 39 94

Laser Measurement Systems:

Phone +31 73 599 50 44
Fax +31 73 599 47 18

Norway

Phone +47 67 56 75 00
Fax +47 67 56 66 10

Poland

Phone +48 2 26 44 83 45
Fax +48 2 26 44 83 42

Singapore

Phone +65 744 3732
Fax +65 841 7747

Spain

Phone +34 93 4 80 31 00
Fax +34 93 4 73 44 69

Sweden

Phone +46 8-680 64 50
Fax +46 8-710 18 75

Switzerland

Phone +41 41 61 92 93 9
Fax +41 41 61 92 92 1

Taiwan

Phone +886 2 2365-6292
Fax +886 2 2368-7397

USA

Phone +1(612) 941-6780
Fax +1(612) 941-9287

Representatives and agencies in all major industrial countries.

Received from your SICK partner: