


**6015WA**

**LABEL-AIRE®**

**Model 6015WA**

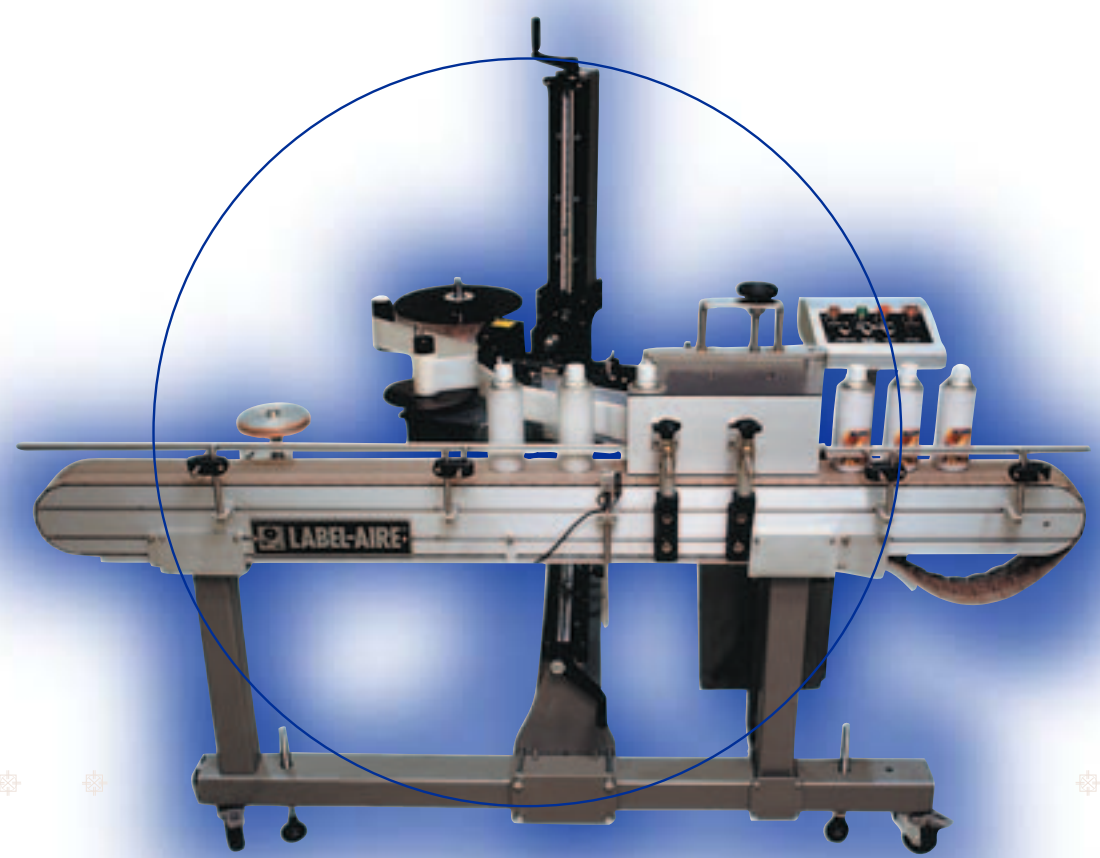

LABEL-AIRE®... LABELING SOLUTIONS THAT APPLY

precision

# 6015WA

## Model 6015WA

**The Label-Aire® Model 6015WA “Wrap Around” Labeling System provides an economical full- and partial-wrap labeling solution.**

The Label-Aire Model 6015WA Labeling System has a smooth-running variable speed conveyor which results in improved labeling accuracy plus the ability to run smaller products. For added convenience, the 6015WA automatically spaces your products and has a user-friendly pedestal-mounted control panel. Since the 6015WA is compatible with our feature rich Label-Aire 2111 and Label-Aire 2115 series labelers, it easily adapts to your growing needs. Designed for trouble-free full- and partial-wrap labeling at medium speed, high-volume, multi-shift operations, and the rugged 6015WA delivers.




- Can easily handle full- and partial-wrap labeling.
- Comes standard with the 2015 wipe-on labeling head.
- Labeling head options include the high-speed 2111 air-blow or the ultra-fast 2115 wipe-on.
- Rugged design to handle most adverse production environments.
- User-friendly pedestal mounted control panel.

550 Burning Tree Road  
Fullerton, CA 92833 USA  
v: 714-441-0700 f: 714-526-0300

Sjaellandsvej 27 A  
Hobro, DK-9500 Denmark  
v: 45 96 57 00 63 f: 45 96 57 00 64

e: [info@label-aire.com](mailto:info@label-aire.com)  
i: [www.label-aire.com](http://www.label-aire.com)

Distributed by:

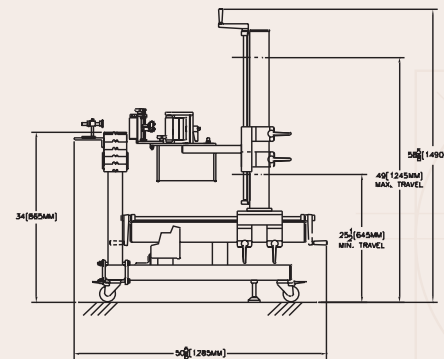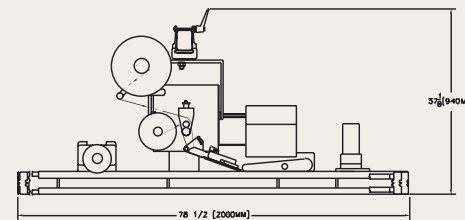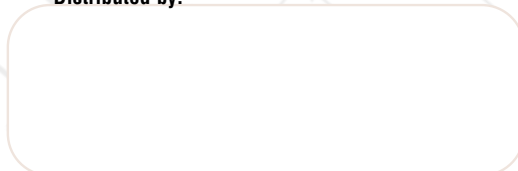

### S P E C S

**Dimensions:**

Height: 37.1" (940 mm)  
Length: 78.5" (2000 mm)  
Width: 50.6" (1285 mm)

**Weight:**

Approx. 650 lbs. (294.8 kg)

**Standard Label Dimensions**

Min.: .25" x .25" feed  
(6 mm x 6 mm)  
Max.: 6" x up to 99" feed  
(152 mm x 2515 mm)

**Label Packaging:**

12" (305 mm) O.D. rolls max. on  
3" (76 mm) I.D. cores

**Dispense Speed:**

Up to 100" ppm depending on  
label size

**Label Placement Accuracy:**

Up to +/- 1/16" (1.6 mm)

**Electrical:**

120 Volts, 60 Hz, 10 Amps.

**Options:**

- Applicator emergency stop
- 6" (152 mm) label core
- Velocity compensation
- Hot stamp coder
- Strobe signal for "low label" or "out of labels"
- Lose loop printer interface to standard cabinet print engines for print and apply wrap-labeling

Label-Aire also provides a full range of pressure-sensitive labelers, rotary, and inline systems to meet your toughest labeling requirements.

member of  
**I M P A X X**  
LABELS AND PACKAGING NETWORK  
**MACHINE SYSTEMS**