



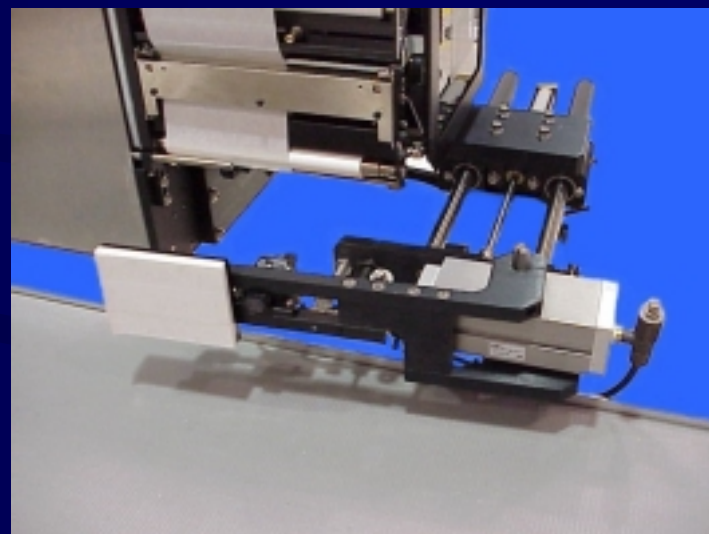


# MODEL 2138 DUAL ACTION TAMP PRINT & APPLY

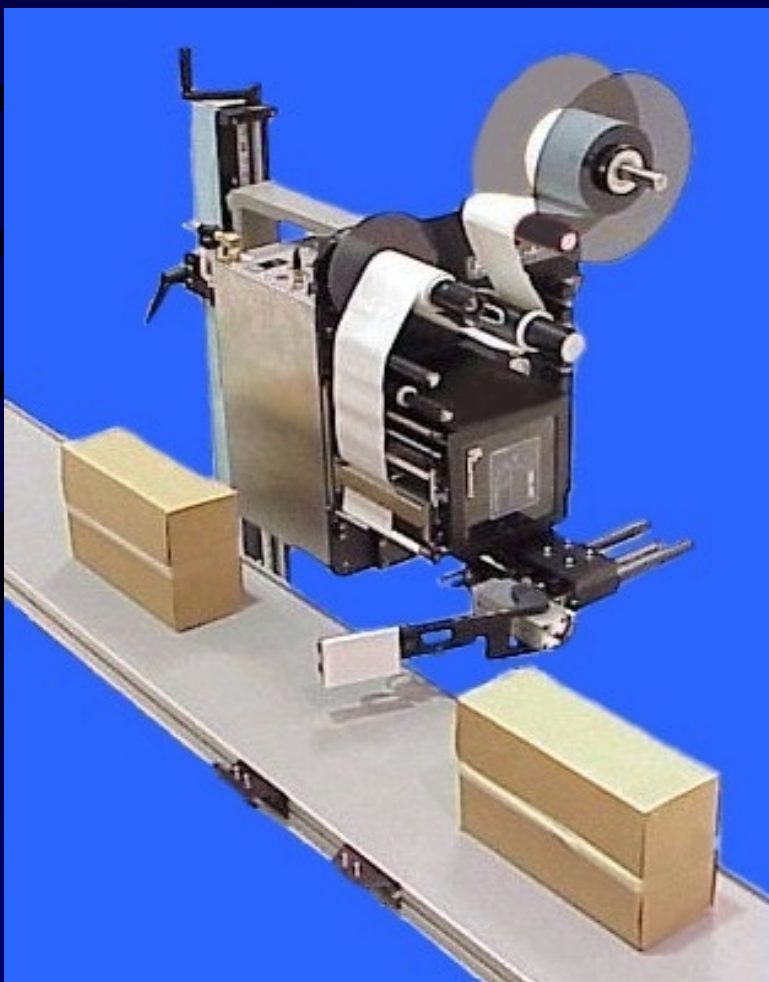

Labels Any Two  
Adjacent Panels

# MODEL 2138 PRINT & APPLY DUAL ACTION TAMP

- ◆ The Model 2138 Dual Action Tamp Printer Applicator thermal transfer or direct transfer imprints and applies labels utilizing tamp blow or tamp apply application techniques.
- ◆ The dual action, air cylinder operated tamp rotates 90 degrees across the conveyor to apply the front label. As the product proceeds, the second straight-line stroke extends using the same cylinder to apply the side panel label.
- ◆ One to one print and apply allows for the immediate application of each label as it is printed.
- ◆ Four configurations allow labeling front and either side or trailing panel and either side.
- **Dimensions:** Height: 36" Width: 32.5"  
Length: 25.75"
- **Weight:** 165 lbs.
- **Label Dimensions:** Label Width: Up to 7"  
Label Length: Up to 6"
- **Print Area:** Up to 6.6" wide  
Dependent upon printer
- **Label Packaging:** 12" O.D. Rolls Maximum  
on 3" I.D. Cores
- **Dispense Speed:** Up to 12" per second  
Dependent upon printer and label size
- **Label Placement Accuracy:** Up to +/- 1/32"
- **Electrical:** 115 Volts AC, 60 Hz, 5 Amps  
220 Volts AC, 50 Hz Optional
- **Air (As Needed):** 4 cfm at 60 psi for most applications
- **Printers Available:** Sato, Zebra, Datamax...

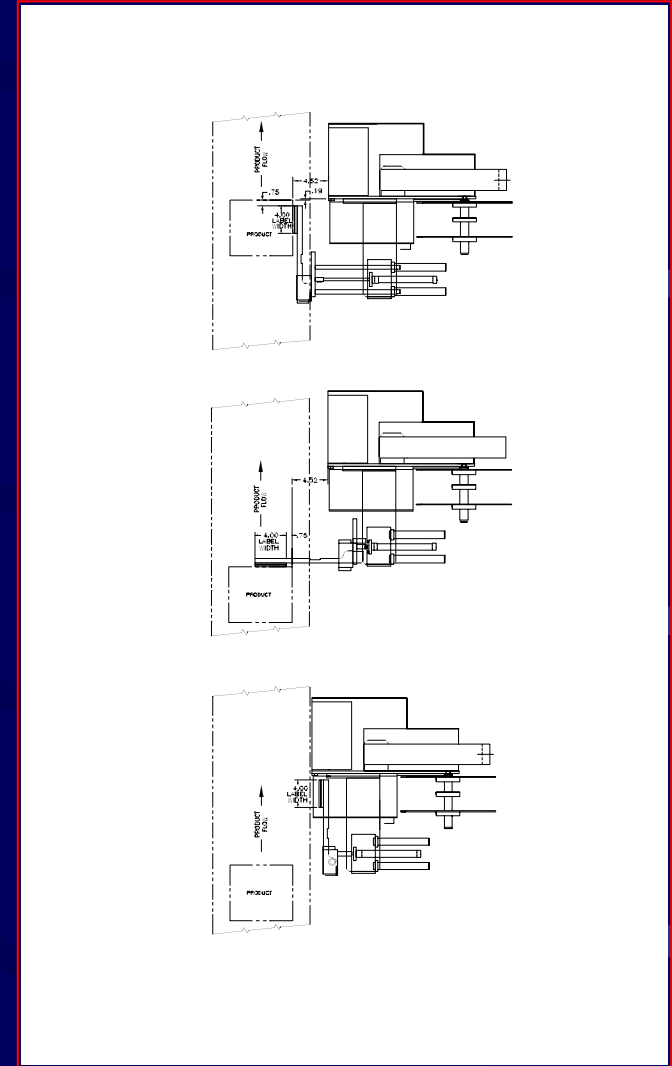

## Label-Aire, Incorporated

550 Burning Tree Road  
Fullerton, CA 92833  
Phone (714) 441-0700  
Fax (714) 526-0300

Please visit us on the web at [www.label-aire-inc.com](http://www.label-aire-inc.com)

## Label-Aire A/S

Industrivej 9  
DK-9510 Arden, Denmark  
Phone 459 856 2900  
Fax 459 856 2901

## Distributed by: